


No	修改编号 REV' NO.	日期 DATE	修改内容 NOTE	修改者 REV' BY	确认 NOTARIZE	备注 REMARK

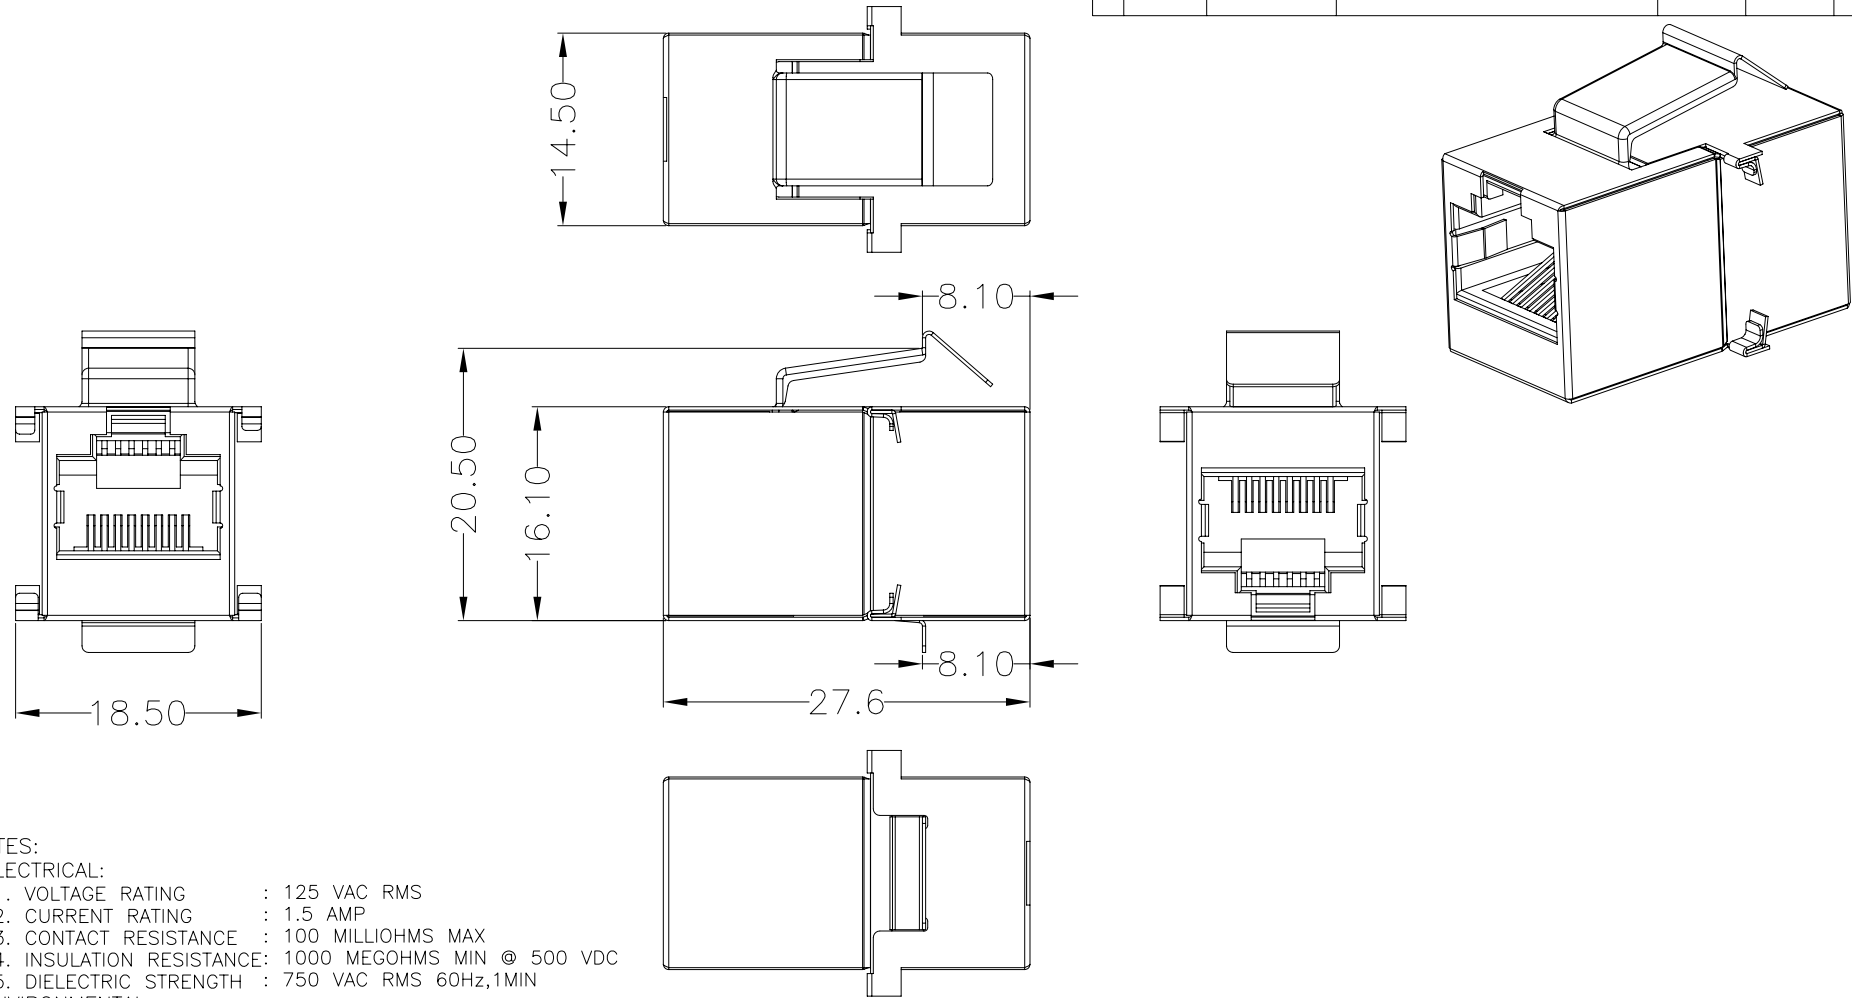

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz,1MIN

ENVIRONMENTAL:

1. STORAGE : -40°TO +85°
2. OPERATION : 0° TO 70°

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

MECHANICAL:

1. SHIELD MATERIAL : STAINLESS STEEL, T=0.25mm
2. HOUSING MATERIAL: PBT+20%.GF UL94V-0
3. INSERT MATERIAL : PBT+20%.GF UL94V-0
4. CONTACT MATERIAL: PHOSPHOR BRONZE STAMP PIN T=0.35mm WITH 6u" GOLD PLATED
5. RJ45 JACK LIFE : 750 TIMES MIN
6. Retentiveness of insertion structure: 50N 60±5s

 比例 SCALE	 总称名称 ASSEMBLY	Keystone Type Coupler FTP	设计 Design by	QHZ 2010/01/11	图号 DRAW No	
	 零件名称 PART NAME	SPP-2IC201	制图 Drawn by	QHZ 2010/01/11	版次 VERSION	1
			校对 Checked by			
			核准 Approved			
			数量 Q'TY			
					页码 1 总页数 1	